




HIGH PERFORMANCE MONOCRYSTALLINE PERC MODULE

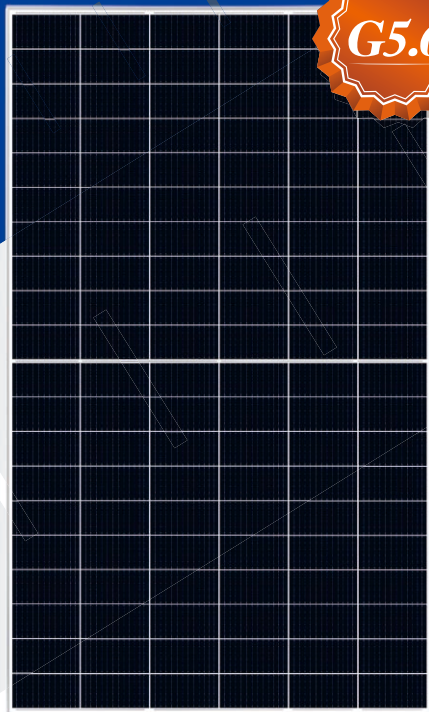

Draft

888

RSM120-8-580M-605M

120 CELL Mono PERC Module	580-605Wp Power Output Range
1500VDC Maximum System Voltage	21.4% Maximum Efficiency

KEY SALIENT FEATURES

- Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing
- Industry leading lowest thermal co-efficient of power
- Industry leading 12 years product warranty
- Excellent low irradiance performance
- Excellent PID resistance
- Positive tight power tolerance
- Dual stage 100% EL Inspection warranting defect-free product
- Module Imp binning radically reduces string mismatch losses
- Warranted reliability and stringent quality assurances well beyond certified requirements
- Certified to withstand severe environmental conditions
 - ♦ Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
 - ♦ Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
 - ♦ Excellent mechanical resistance: wind load 2400Pa & snow load 5400Pa



RISEN ENERGY CO., LTD.

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.

Distributor in Vietnam: NGUYEN VINH TIEN CO., LTD

Add: B11, Tan Phong Residential Area, Town 7, Tan Phong Ward, Bien Hoa City, Dong Nai Province.

Tel: +842513 680968


E-mail: nguyenvinh tien2013@gmail.com

Fax: +842513 680421

Website: www.solar.net.vn

LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 25 year Linear Power Warranty

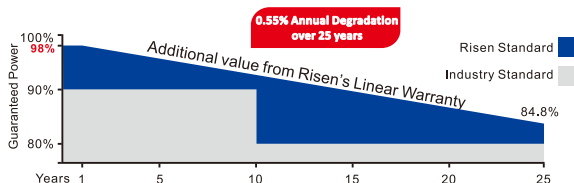


* Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd



Preliminary For Global Market

Dimensions of PV Module

Unit: mm

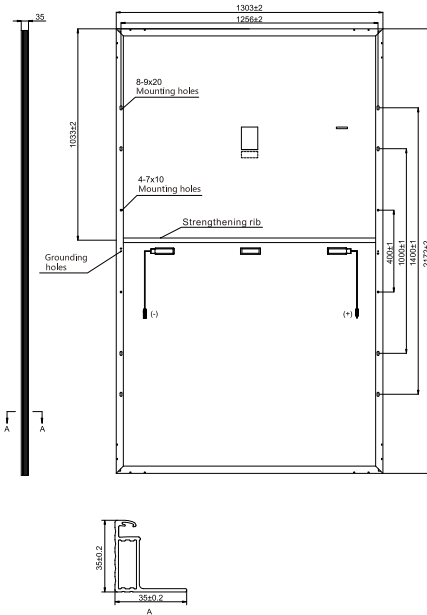

ELECTRICAL DATA (STC)

Model Number	RSM120-8-580M	RSM120-8-585M	RSM120-8-590M	RSM120-8-595M	RSM120-8-600M	RSM120-8-605M
Rated Power in Watts-Pmax(Wp)	580	585	590	595	600	605
Open Circuit Voltage-Voc(V)	40.80	41.00	41.20	41.40	41.60	41.80
Short Circuit Current-Isc(A)	18.11	18.16	18.21	18.26	18.32	18.37
Maximum Power Voltage-Vmpp(V)	33.94	34.12	34.32	34.50	34.70	34.88
Maximum Power Current-Impp(A)	17.10	17.15	17.20	17.25	17.30	17.35
Module Efficiency (%) *	20.5	20.7	20.8	21.0	21.2	21.4

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

* Module Efficiency (%): Round-off to the nearest number

ELECTRICAL DATA (NMOT)

Model Number	RSM120-8-580M	RSM120-8-585M	RSM120-8-590M	RSM120-8-595M	RSM120-8-600M	RSM120-8-605M
Maximum Power-Pmax (Wp)	439.5	443.1	447.0	450.7	454.6	458.3
Open Circuit Voltage-Voc (V)	37.94	38.13	38.32	38.50	38.69	38.87
Short Circuit Current-Isc (A)	14.85	14.89	14.93	14.97	15.02	15.06
Maximum Power Voltage-Vmpp (V)	31.50	31.66	31.85	32.02	32.20	32.37
Maximum Power Current-Impp (A)	13.95	13.99	14.04	14.08	14.12	14.16

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline
Cell configuration	120 cells (6×10×6×10)
Module dimensions	2172×1303×35mm
Weight	31.5kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy type 6005-2T6, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), Positive(+)350mm, Negative(-)350mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.34%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	30A
Limiting Reverse Current	30A



PACKAGING CONFIGURATION

	40ft(HQ)
Number of modules per container	527
Number of modules per pallet	31
Number of pallets per container	17
Box gross weight[kg]	1000

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2020 Risen Energy. All rights reserved. Specifications included in this datasheet are subject to change without notice.

THE POWER OF RISING VALUE

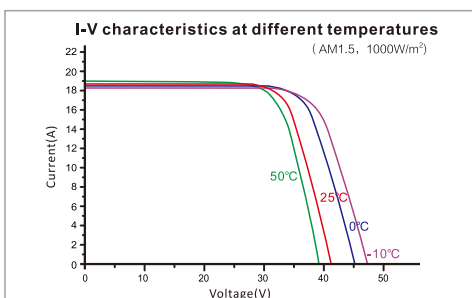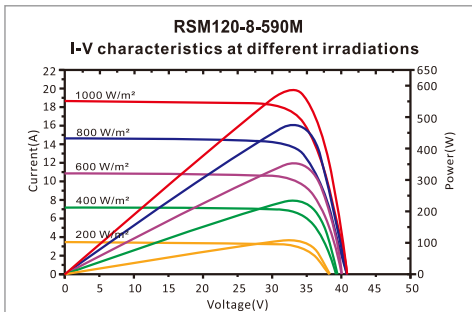

Our Partners: